
PROSE

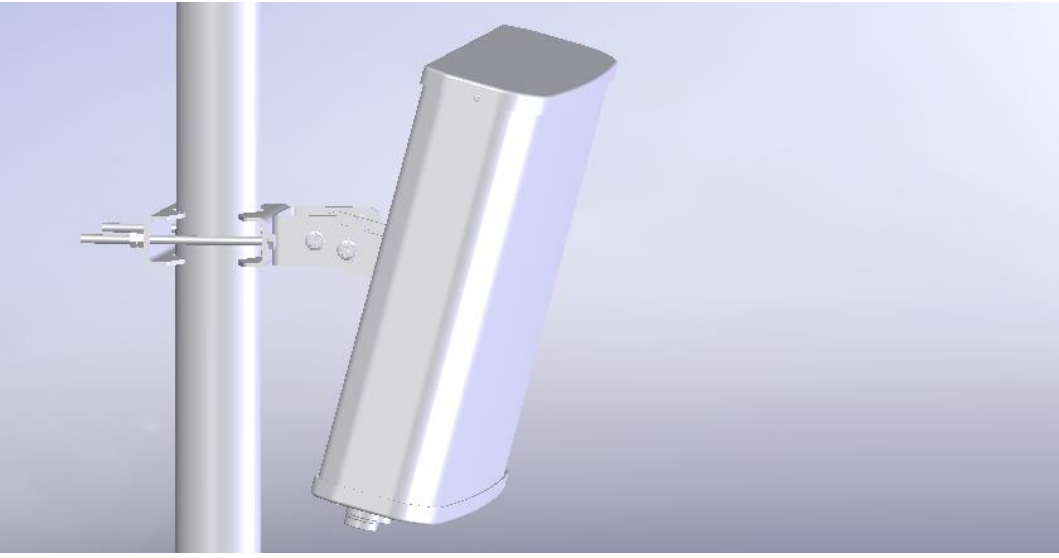

INSTALLATION GUIDE

INSTALLATION GUIDE FOR MINITYPE ANTENNA

Item: K003238 Revision: C Date: 2025-09-10

INSTALLATION NOTE

1. Do not install near power lines. Power lines, telephone lines, and guy wires look the same. Assume any wire or line can electrocute you.
2. Do not install on a wet or windy day or when lightning or thunder is in the area. Do not use metal ladder.
3. Wear shoes with rubber soles and heels. Wear protective clothing including a long-sleeved shirt and rubber gloves.
4. For antenna install, Maintenance, Removal. Only qualified, personnel are allowed to operate.
5. Do not stack the antennas each other, And forbidden to place point loads on antenna radome.
6. Do not remove the protection caps of antenna ports unconnected to jumpers. Keep the ports waterproof.
7. Recommended pipe OD: 50~115mm.

RECOMMENDED WRENCH TORQUE

Recommended wrench Torque: 20N.m; Wrench Size: 13#

UNPACKING

Make sure that the antenna and the accessory items listed below are provided and not be damaged during transport.

- Antenna
- Mounting Kits & Manual

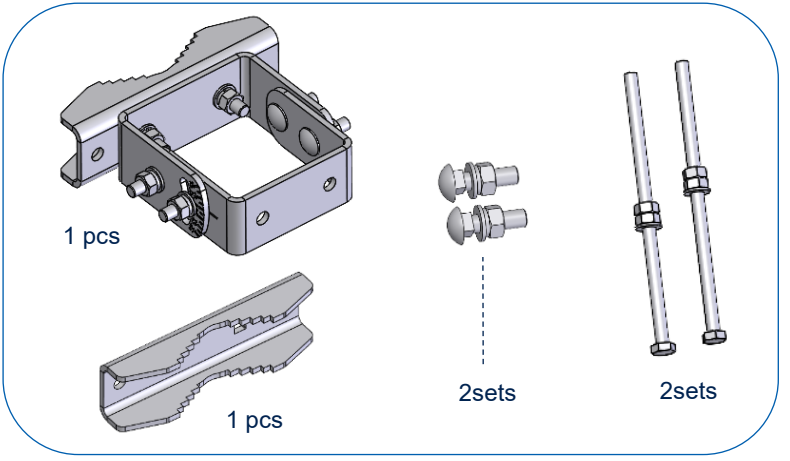


Figure 1: Mounting Kits

Assemble Mounting Kits On Antenna

Install the bracket onto antenna before lifting.

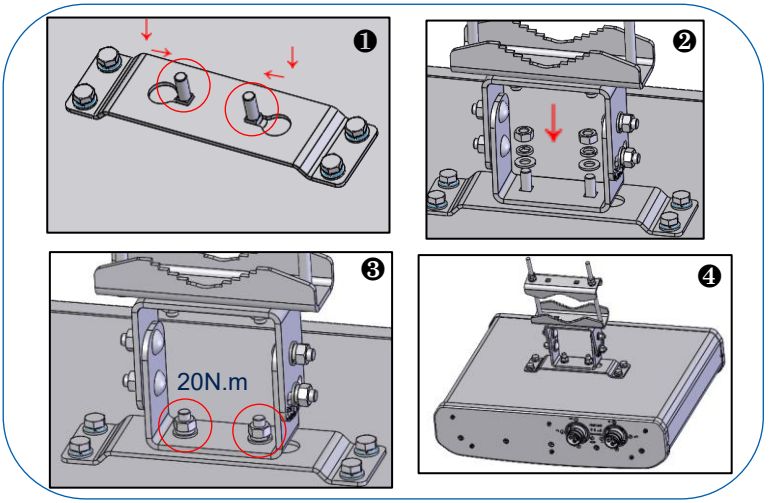



Figure2 : Install Bracket On Antenna

Tips: Fasten the marked nuts.

INSTALLATION OF ANTENNA

Clamp the bracket to the pipe after lifting antenna onto tower.

- Tighten the marked nuts of bracket. (Figure 3)
- Recommended wrench torque: 20N.m

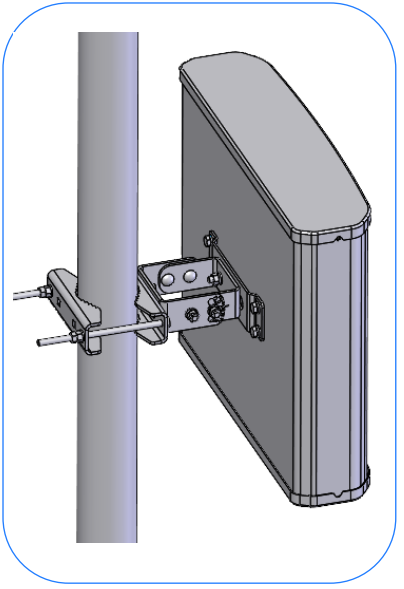


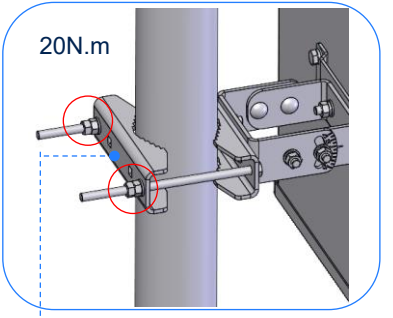


Figure 3



ADJUST ANTENNA MECHANICAL TILT

- Loosen the fasteners (❶❷❸❹) . (Figure 4&5)
- Setting the tilt of antenna then tighten all the marked nuts.
- Recommended wrench torque: 20 N.m.




Figure 4





Figure 5



Scale line for tilt setting.

Tips:
Loosen the marked nuts to
Reset the tilt angle of antenna.

PROSE Technologies (SuZhou) Co., Ltd.
No. 6, Shen'an Road, Dianshanhu, Kunshan,
Jiangsu, China, 215345
Tel : (+86 512) 86896789
Fax : (+86 512) 86890666
www. prosetechnologies.com